


Subsea CPT



For use in

- Pipelines
- Ports and harbours
- Dredging & construction
- Cable route surveys
- Off-shore wind farms
- Environmental Survey
- Wave Energy

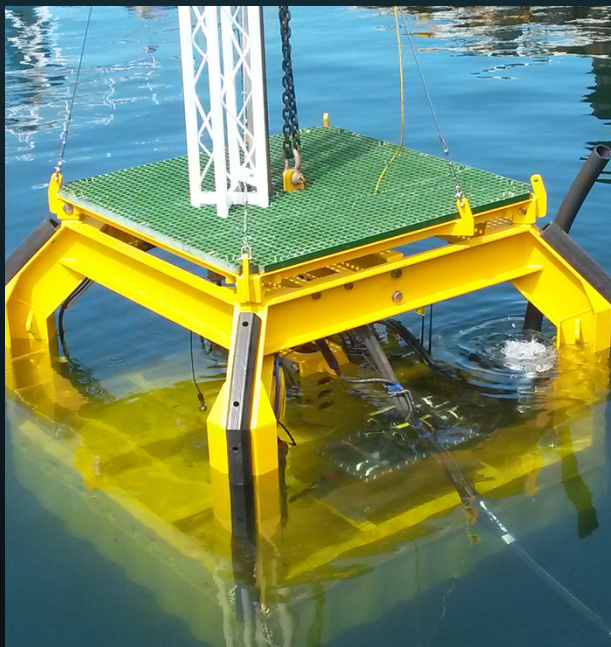

L 2.3m; W: 2.3m; H: 2.8m (min. 2.3m)

Frame weight: 5000kg

Pushing Force/Capacity:

Max 150kN @ 15t reaction weight

Without suction anchor: 40kN

Sounding Speed: 20mm / second

Removal Speed: 40mm / second

Operating Depth: Max. 1500m

Geotechnical Services provided:

CPT, CPTu (10 & 15 tonne cones)

Soil Sampling , SDMT

Output: qc, fs, u, Rf, Inclination